


Ezy-Push® CP-BS Lead Safe™ Push Button Standard Wall Top Assembly



PRODUCTS

Item Code	Description
172.71.43.01	Ezy-Push® CP-BS Lead Safe™ Push Button Standard Wall Top Assembly - Cold
172.71.43.02	Ezy-Push® CP-BS Lead Safe™ Push Button Standard Wall Top Assembly - Hot

SPECIFICATIONS

- Easy to maintain.
- Vandal resistant push button design.
- Chrome plate finish for easy cleaning and added durability.
- Lead Safe™ brass construction*

IMPORTANT: The push button has only two modes. Fully open or closed. Therefore, flow restriction must be fitted preceding the valve bodies to adjust the flow rate to the desired level.

IMPORTANT: All Ezy-Push® top assemblies are tested in accordance with AS/NZS 3718 and leave our premises in good working order.

*Our Lead Safe™ product range is compliant with the Lead-Free Requirements of the NCC 2022 Vol. 3, Clause A5G4 (2) and NSF/ANSI 372.

** Any flow controller incorporated in the outlet to be tightened to prevent removal by hand. As Per AS3718.

WARNINGS: Special attentions to be paid on notes, photos, images, or drawings of assembly steps marked with the warning symbol.



TECHNICAL DATA

Inlet	G 5/8 - Male	
Headwork	Push Button	
Working Pressure Range (kPa)	Min	50
	Max	500
Working Temperature Range (°C)	Min	5
	Max	60
Finish	Chrome	

NOTE: Galvin Engineering continually strive to improve their products. Specifications may change without notice.


TOOLS REQUIRED

- Spanner or adjustable crescent
- Screwdriver
- Hex key (supplied)

PRE-INSTALLATION





NOTE: Before installation, all lines must be flushed. We recommend that a line strainer be installed prior to Push Button Tapware to eliminate any foreign material.



INSTALLATION

INSTALLATION COMPLIANCE: Galvin Engineering products must be installed in accordance with these installation instructions and in accordance with AS/NZS 3500, the PCA and your local regulatory requirements. Water and/or electrical supply conditions must also comply to the applicable national and/or state standards. Failing to comply with these provisions shall void the product warranty and may affect the performance of the product.

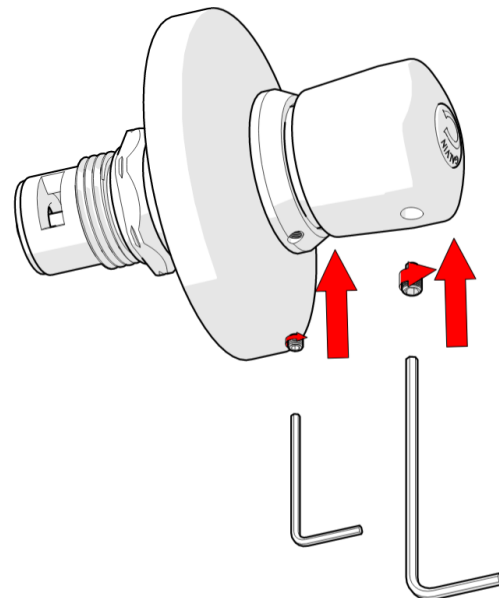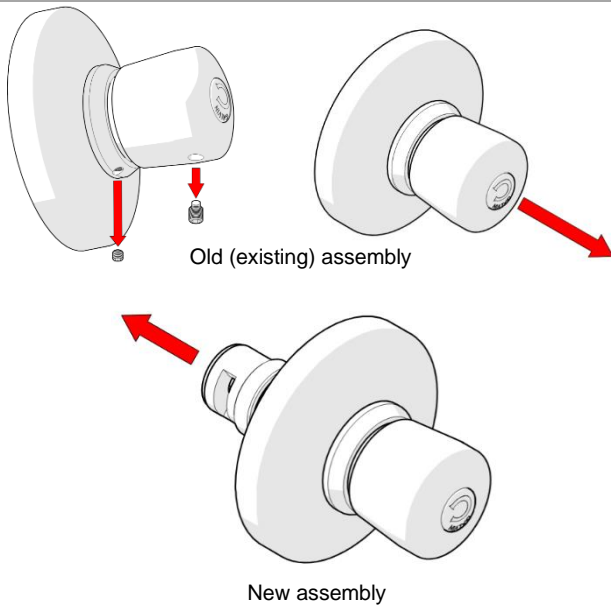


1. Fit Top Assembly

- Disassemble existing push button assembly
- Ensure the inlet body is secure as it will lose its support once the push button assembly has been removed.
- Remove existing push button assembly from the inlet body.
- Check & clean the inlet prior to fitting the replacement assembly.
- Fit new push button assembly as shown.

2. Secure Flange Ring and Push Button

- Fit flange ring and push button and secure with grub screws using the supplied Hex key

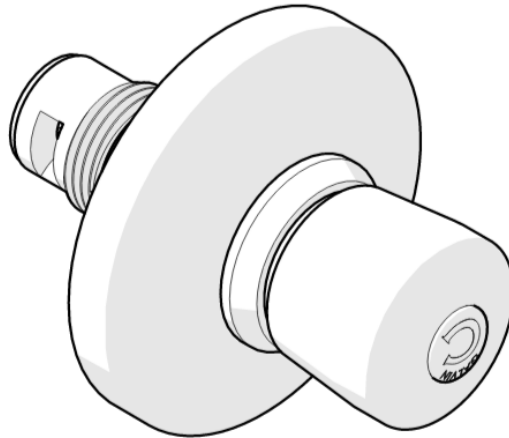

3. Testing

- Once installed, check for leaks and correct operation.

TROUBLESHOOTING		
PROBLEM	CAUSE	RECTIFICATION
Inconsistent flow	Blocked top assembly	Remove top assembly and clean
Water is not flowing from tap	Water is turned off	Turn on water
Continuous flow	Top assembly loose or internally obstructed or damaged	Remove top assembly, clean with water and re-grease spindle if required
Button hard to press	The mains pressure may be too great	Reduce to below 500kPa (70PSI). Re-grease spindle if required

WARRANTY

Galvin Engineering products are covered under our Manufacturer's Warranty. Galvin Engineering products must be installed in accordance with the installation instructions and in accordance with AS 3500 and NCC Volume Three, relevant Australian Standards and local authorities applicable to product being installed. Water and electrical supply conditions must also comply to the applicable national and/or state standards, failing to comply with these provisions may void the product warranty and affect performance of the product.

Please visit www.galvinengineering.com.au to view the full warranty, our Installation Compliance and Maintenance & Cleaning information as well as any other additional information.

Within Australia: **1300 514 074** Outside Australia: P: **+61 (0)8 9338 2344**

F: +61 (0)8 9338 2340

sales@galvinengineering.com.au

www.galvinengineering.com.au

ABN: 78 008 719 382

PERTH | SYDNEY | MELBOURNE | BRISBANE | ADELAIDE

