

Ezy-Push® CP-BS Lead Safe™ Pillar/Bib SBA w/ Grub Screw

PRODUCT CODES

- 172.73.43.08



SPECIFICATIONS

- High quality chrome finish for easy cleaning, added durability and hygiene maintenance
- The Ezy-Push® top assembly is designed to screw directly into any 15mm body to Australian Standard AS/NZS 3718.
- Lead Safe™ brass construction. *

IMPORTANT: All Ezy-Push taps are tested in accordance with AS/NZS 3718 and leave our premises in good working order

*Our Lead Safe™ product range is compliant with the Lead Free Requirements of the NCC 2022 Vol. Three, Clause A5G4(2) and NSF/ANSI 372.
**Any flow controller incorporated in the outlet to be tightened to prevent removal by hand. As Per AS3718.

WARNINGS: Special attentions to be paid on notes, photos, images, or drawings of assembly steps marked with the warning symbol.




TECHNICAL DATA

Inlet	G 5/8 - Male	
Headwork	Push button	
Working Pressure Range (kPa)	Min	50
	Max	500
Working Temperature Range (°C)	Min	5
	Max	65
Nominal Flow Rate (LPM)	N/A	
Construction	Brass	
Finish	Chrome	

NOTE: Galvin Engineering continually strive to improve their products. Specifications may change without notice.


DIMENSIONS

! *NOTE: Before installation, all lines must be flushed. We recommend that a line strainer be installed prior to eliminate any foreign material.*

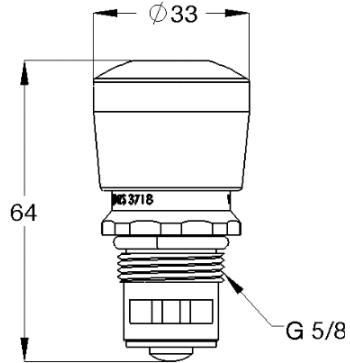


INSTALLATION

INSTALLATION COMPLIANCE: Galvin Engineering products must be installed in accordance with these installation instructions and in accordance with AS/NZS 3500, the PCA and your local regulatory requirements. Water and/or electrical supply conditions must also comply to the applicable national and/or state standards. Failing to comply with these provisions shall void the product warranty and may affect the performance of the product.

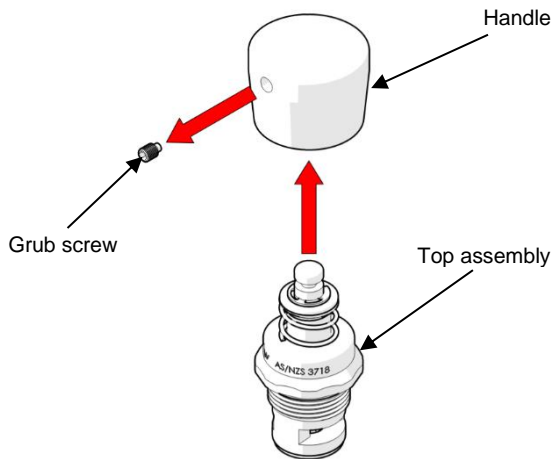


1. Disassemble items

- Unscrew the grub screw from the handle and remove from top assembly.

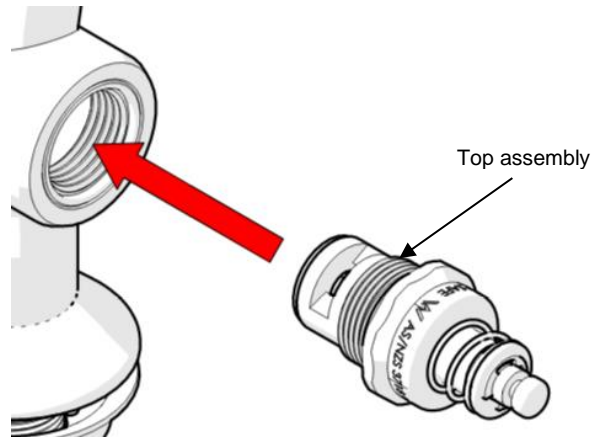


2. Fit top assembly

- Fit top assembly to tapware body as shown

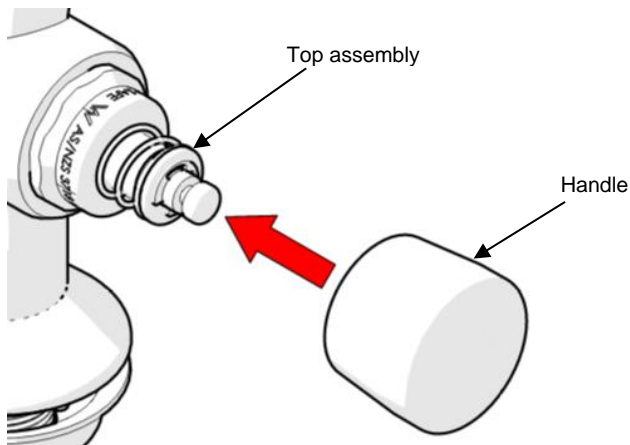

3. Fit handle

- Fit the handle to the top assembly and lock using grub screw supplied.
- After assembly, test for correct operation.

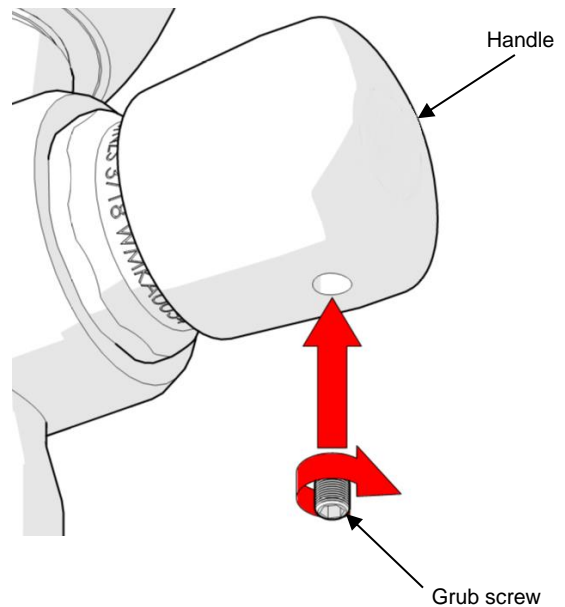

TROUBLESHOOTING		
PROBLEM	CAUSE	RECTIFICATION
Inconsistent flow	Blocked top assembly	Remove top assembly and clean
Continuous flow	Top assembly loose, internally obstructed or damaged	Remove top assembly, clean with water and re-grease spindle if required.
Button hard to press	The mains pressure may be too great	Reduce to below 500kPa. Regrease spindle if required

WARRANTY

Galvin Engineering products are covered under our Manufacturer's Warranty. Galvin Engineering products must be installed in accordance with the installation instructions and in accordance with AS 3500 and NCC Volume Three, relevant Australian Standards and local authorities applicable to product being installed. Water and electrical supply conditions must also comply to the applicable national and/or state standards, failing to comply with these provisions may void the product warranty and affect performance of the product.

Please visit www.galvinengineering.com.au to view the full warranty, our Installation Compliance and Maintenance & Cleaning information as well as any other additional information.